

K-JET

PRESSURE WASH


NEW


MADE IN
manuli®



K-JET

PRESSURE WASH

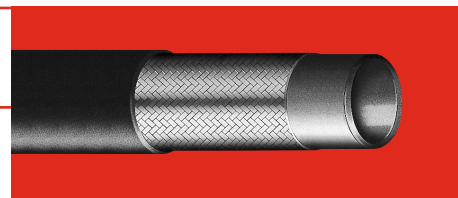

PART. REF.	HOSE SIZE							
		R.O.D.	O.D.	MAX W.P.	BURST PRESSURE	MIN. BEND RADIUS	WEIGHT	MF2000 FITTING

	DN	dash	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	g/m	lb/ft	
H02003006*	6	-4	1/4"	10,3	0,41	12,1	0,48	210	3040	840	12180	50	1,97	150	0,10	MF+M00830-04
H02003008*	8	-5	5/16"	11,9	0,47	13,9	0,55	210	3040	840	12180	55	2,17	200	0,13	MF+M00830-05
H02003010*	10	-6	3/8"	14,5	0,57	16,5	0,65	210	3040	840	12180	65	2,56	295	0,22	MF+M03400-06
H02003012*	12	-8	1/2"	17,7	0,70	19,7	0,78	210	3040	840	12180	90	3,54	400	0,27	MF+M03400-08

Standard packaging: reel

* The complete code for each item is composed by 13 digits, the last 4 digits indicate the type of packaging.

Please see the full list of alternative options on Manuli web site.

* MF3000 OPB fitting solution available

KEY PERFORMANCE

Dust free smooth surface • Indelible branding • Compact structure: easy handling, reduced bend radius • Good abrasion resistance • Designed to meet IEC-2 (safety factor 4:1) and DIN EN 1829-2

MAIN APPLICATIONS

Water-cleaning equipment, ideal for hobby and semi-professional machines

CONTINUOUS SERVICE TEMPERATURE RANGE

+15°F / +275°F -10°C / +135°C

RECOMMENDED FLUIDS

Water, mineral oils, vegetable and rape seed oils, glycol and polyglycol based oils, synthetic ester based oils, oils in aqueous emulsion



Product designed for pressure wash applications. Any different use may reduce service life. Please contact Manuli Rubber Industries for more information

INSERT: MF2000® - MULTIFIT TYPE

TUBE: Water resistant synthetic rubber

REINFORCEMENT: One high tensile steel braid

COVER: Environment resistant synthetic rubber. Available also in blue colour (first 6 code's digits: "H02008")

APPLICABLE SPECS.: MANULI® Design



C/ Paralela Tres
Polígono Industrial A Granxa
36400 **PORRIÑO** (Pontevedra)
Tel.: 34.986.213.083 Fax: 34.986.295.138
e-mail: ventasvig@rodaindustria.com

Manuli Rubber Industries

MF2000 CRIMPING CHART (April 2009)

Hose type	size				
	Dash	-4	-5	-6	-8
	DN	6	8	10	12
K-JET (Black & Blue versions)	Fitting (insert + ferrule)	MF+M00830-04	MF+M00830-05	MF+M03400-06	MF+M03400-08
	crimping diameter (mm)	15,3	16,2	19,8	22,6
	external skive length (mm)	no skive	no skive	no skive	no skive
	internal skive length (mm)	-	-	-	-

MF=MF2000 Multifit insert